
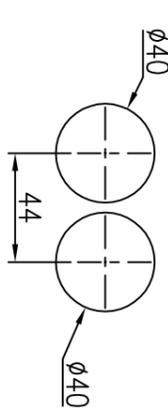
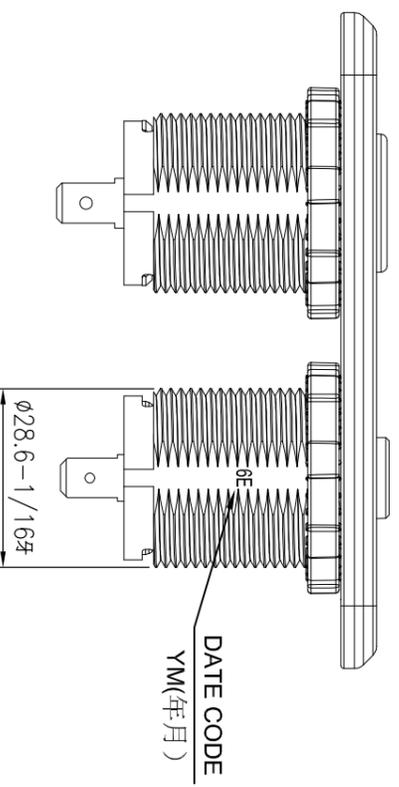
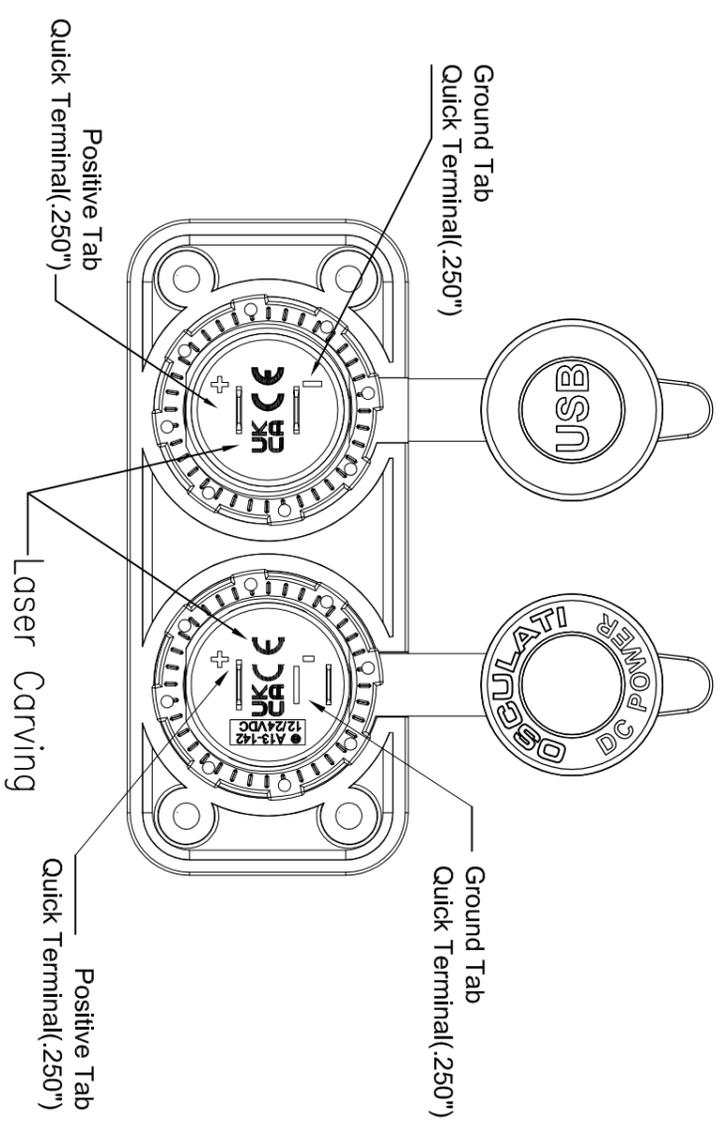
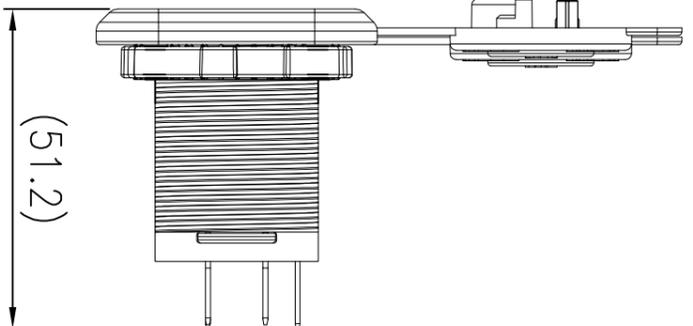


Voltage	A:12V DC B:24V DC	
Output	Output A : USB A QC3.0(5V3A/9V2A/12V1.5A) USB C PD(5V3A/9V3A/12V3A) Output B : USB A QC3.0(5V3A/9V2A/12V1.5A) USB C PD(5V3A/9V3A/12V3A/ 15V3A/20V2.25A) Uses both USB A + C(5V 2.4A+2.4A) Auto Sockets: 20A 12V DC/10A 24V DC	
Max Output Power	45W Max	
Approvals	CE(EN50498)/UKCA	
Operating Temperatures	-30°C~45°C	

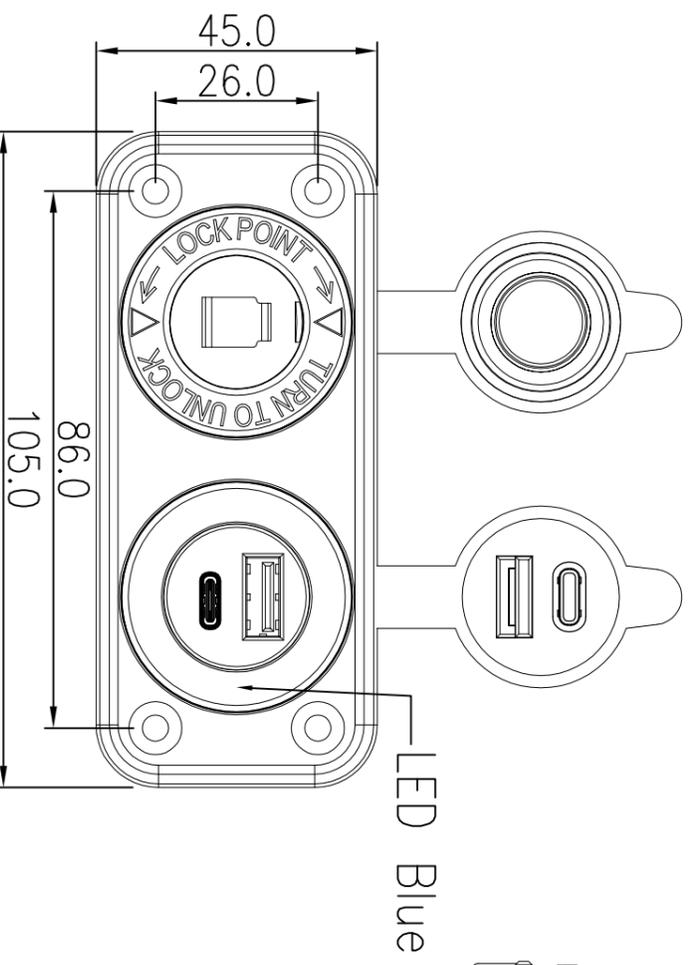

Tolerances ±0.3 Unless Otherwise Specified

Date	Name	Description	No.
			△
			△