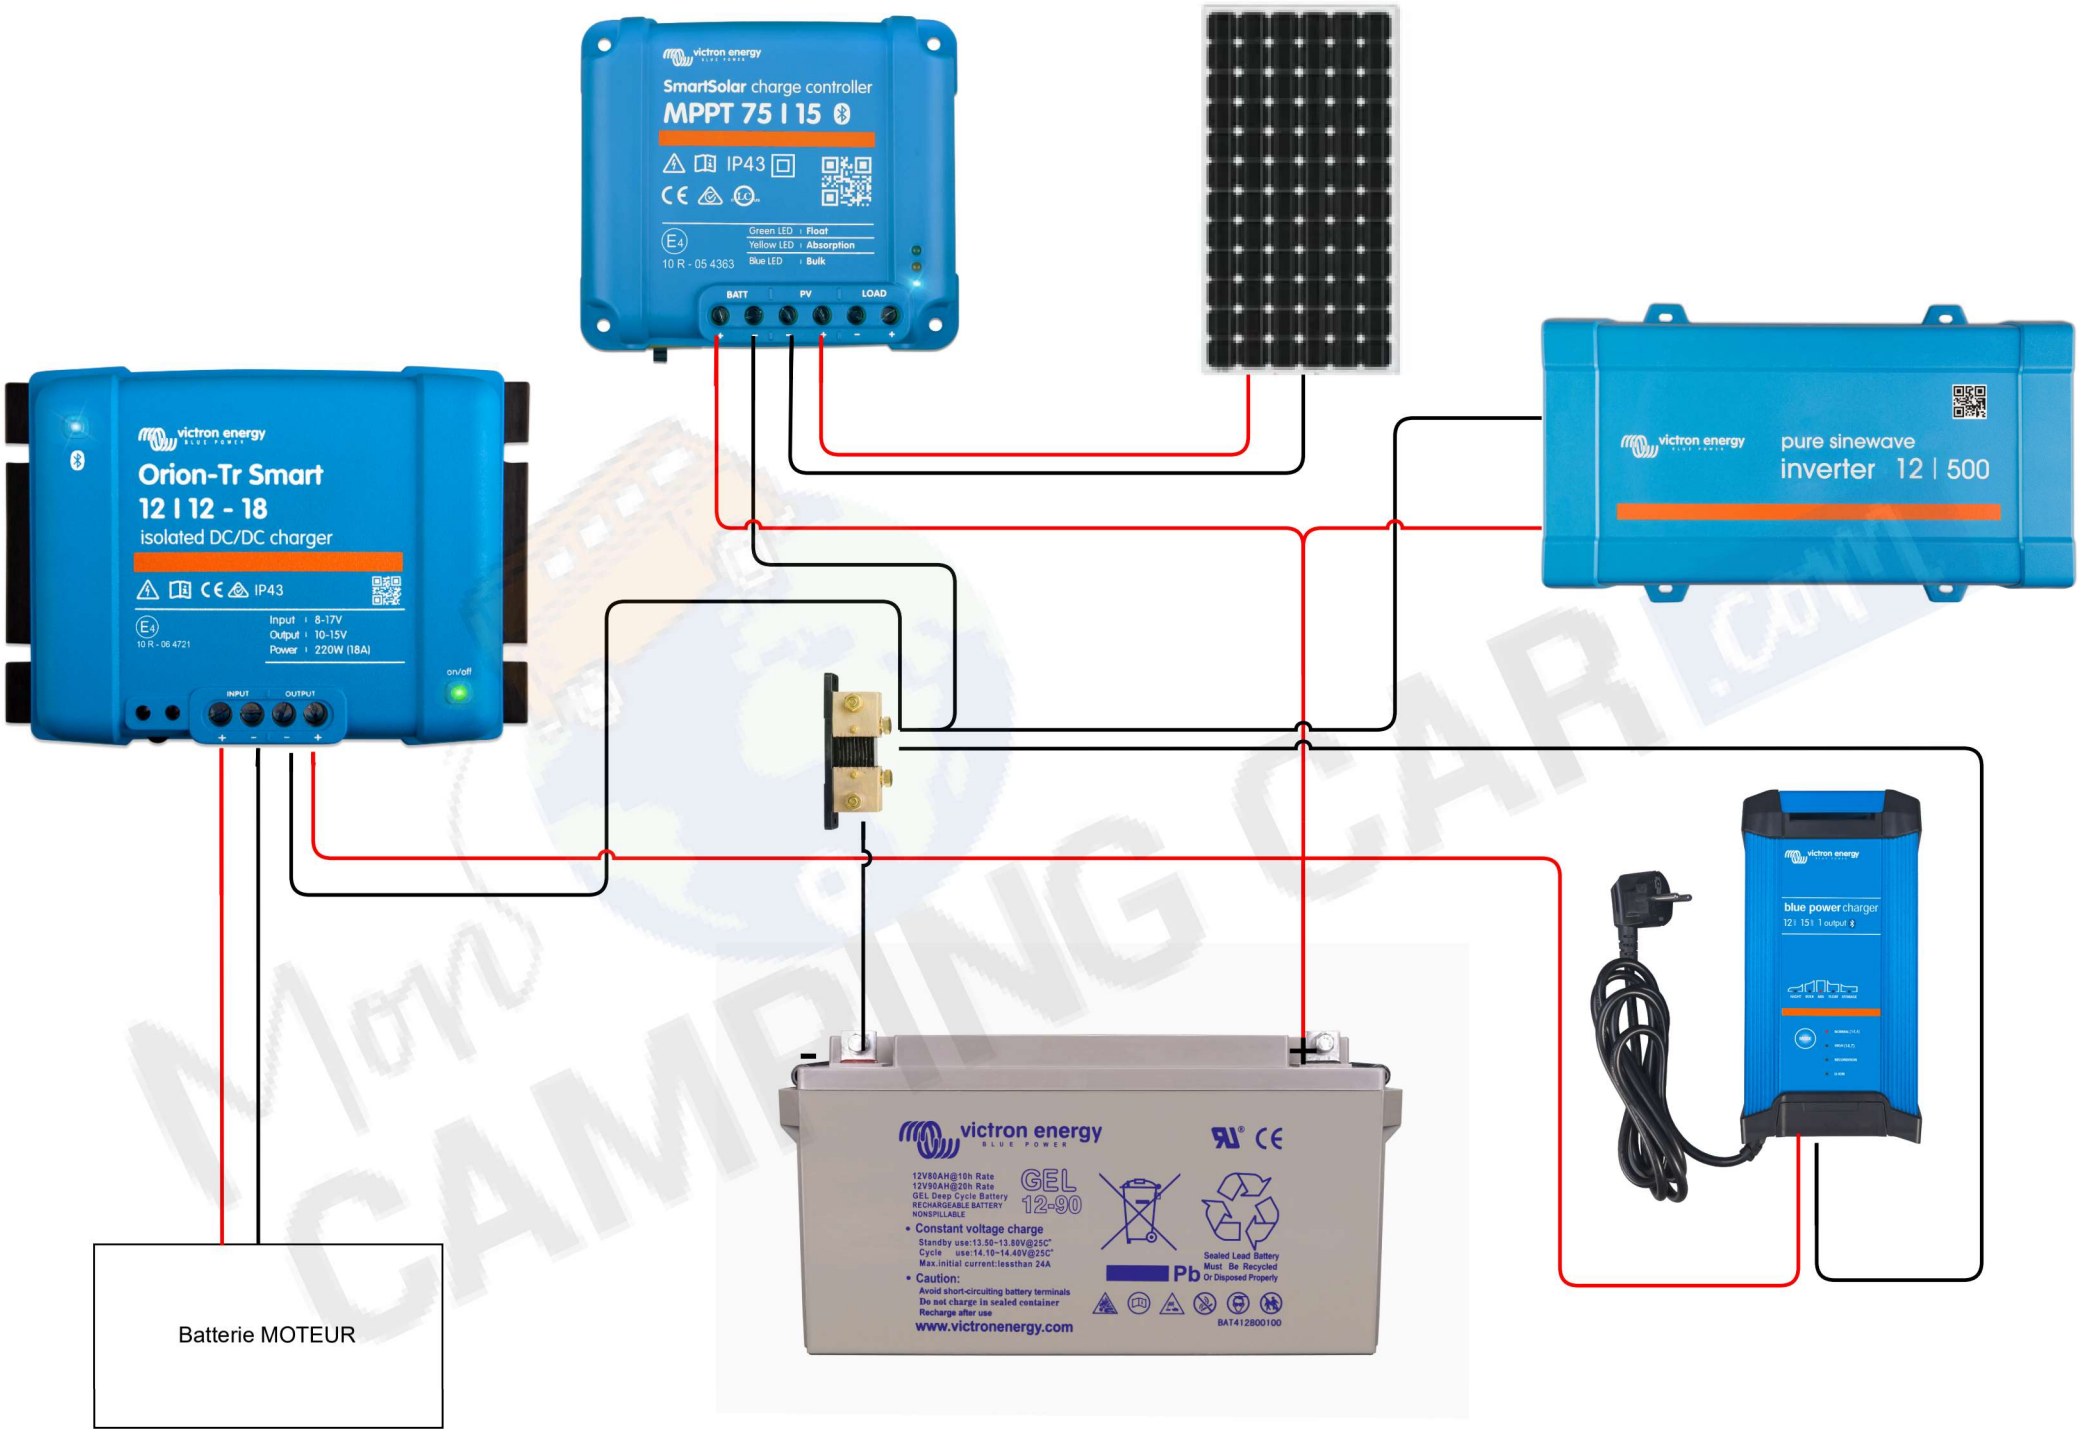
victron energy
SmartSolar charge controller
MPPT 75 | 15
IP43
10 R - 05 4363
Green LED : Float
Yellow LED : Absorption
Blue LED : Bulk
BATT
PV
LOAD
victron energy
Orion-Tr Smart
12 | 12 - 18
isolated DC/DC charger
IP43
10 R - 06 4721
Input : 8-17V
Output : 10-15V
Power : 220W (18A)
INPUT
OUTPUT
on/off
victron energy
pure sinewave
inverter 12 | 500
victron energy
blue power charger
12 | 15 | 1 output
victron energy
GEL 12-90
12V80AH@10h Rate
12V90AH@20h Rate
GEL Deep Cycle Battery
RECHARGEABLE BATTERY
NONSPILLABLE
• Constant voltage charge
Standby use:13.50~13.80V@25C°
Cycle use:14.10~14.40V@25C°
Max.initial current:lessthan 24A
• Caution:
Avoid short-circuiting battery terminals
Do not charge in sealed container
Recharge after use
www.victronenergy.com
Pb
Sealed Lead Battery
Must Be Recycled
Or Disposed Properly
BAT412800100
Batterie MOTEUR