



SOLAR PANELS RANGE

BC



MORE ADVANCED TECHNOLOGY

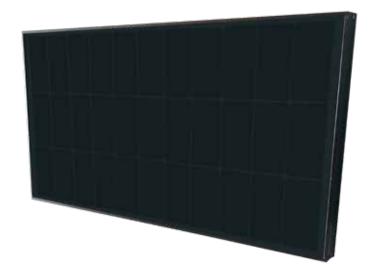



HIGH PERFORMANCE

Higher efficiency than conventional solar panel.



MORE AESTHETIC

A more aesthetic finish with a completely black face.



ROBUST

Robust structure with high-quality aluminum frame



RELIABILITY

More reliable, with no welded joints

Discover the energy revolution with the EZA range of solar panels featuring IBC technology for maximum efficiency, a real technological breakthrough that redefines the standards of performance and efficiency in solar energy.

IBC technology (Interdigitated Back Contact) optimizes solar energy collection by moving all metal contacts to the back of the solar cells, enabling better conversion of sunlight into electricity. In this way, the solar panel minimizes its losses, and improves the efficiency of its solar cells.

This cutting-edge technology makes EZA solar panels a clean energy solution with exceptional performance. Thanks to their innovative design, these panels outperform conventional models by delivering high yields, even in variable light conditions.

Thanks to their **robust structure** and high-quality aluminum frame, these solar panels are designed to ensure outstanding durability and withstand harsh environmental conditions, all to guarantee reliable long-term performance.

With all metal contacts located at the rear of the solar cells, the front face of the solar panel benefits from a full black finish, making it **more aesthetically** pleasing and a perfect match for your cherished leisure vehicle!

When you choose EZA IBC solar panels, you're investing in the future of clean energy. Redefine your carbon footprint and benefit from a reliable, sustainable energy source with our range of state-of-the-art solar panels.



SOLAR PANELS RANGE



418282 155W	418283 200W	418284		
		250/4/		
IBO		250W		
	IBC			
26,8V	20,6V	22,1V		
6,65A	11,45A	13,25A		
23%				
Black aluminum				
By gluing				
FULL BLACK				
Pre-assembled with 5m cable				
Anti-return diode / UV-resistant cable				
1255 x 585 x 44,5	1202 x 770 x 44,5	1526 x 770 x 44,5		
9,1 KG	11 KG	13,5 KG		
Roof feed-through				
CE IP65				
2 years				
	Pre-assembled Anti-return diode / 1255 x 585 x 44,5 9,1 KG Roof feed	Pre-assembled with 5m cable Anti-return diode / UV-resistant cable 1255 x 585 x 44,5		

REFERENCING & LOGISTICS DATA		EZA IBC SOLAR PANELS			
	418281	418282	418283	418284	
EAN CODE	3700628274674	3700628274681	3700628274698	3700628274704	
CUSTOMS CODE		8541420000			
SUPPLIER ORIGIN		CHINA			
DIMENSIONS IN MM PACKAGED PRODUCT (L x W x H)	1080 x 620 x 60	1270 x 620 x 60	1210 x 810 x 60	1540 x 810 x 60	
PACKAGING		BROWN BOX			
GROSS WEIGHT (KG)	9,3	10,7	13	16	
QTY CARTON		1			
QTY / MASTER CARTON / GROSS WEIGHT	4 / 37,2 KG	4 / 42,8 KG	4 / 52 KG	4 / 64 KG	
QTE PALLET/GROSS WEIGHT	56 / 520,8 KG	56 / 599,2 KG	48 / 624 KG	48 / 768 KG	
QTE CT /20	460 pcs	392 pcs	316 pcs	280 pcs	
QTE CT /40HC	1060 pcs	908 pcs	732 pcs	650 pcs	

COMPATIBLE GLUE KITS				
GLUE KIT 3M	479917			
GLUE KIT SIKA	479912			

To access the digital version, scan this QR Code.







